







SMART KLINKER



Processing instructions



4x

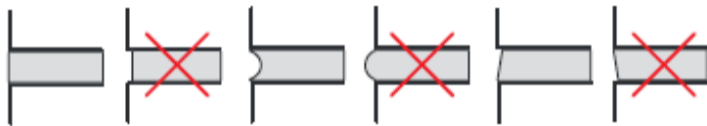

Order bricks for connected construction sections in time.

Process bricks from at least 4 packs in staircase shape.

Processing of the bricks only from +5°C.

Mortar must have the appropriate composition for the bricks.

Protect opened pallets from humidity.

Bricks must be bricked up with full joints and with an adhesive bond

Joint formation

Joint smoothing must be bricked up and grouted in one operation.

Before the mortar has hardened, smooth off with joint iron, wood chip or hose

Protect fresh brickwork from dirt and weather by covering with foil.

Protect fresh brickwork from rain, sun and frost.

Drain off rainwater.

Cover the window parapet or temporarily close the opening with foil.

Cleaning with water and a root brush. Do not use acid